

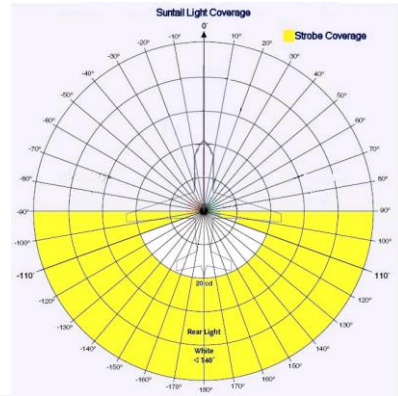
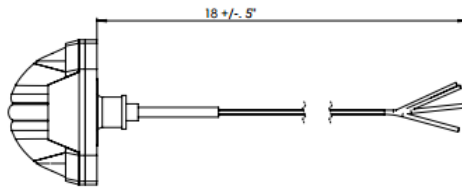



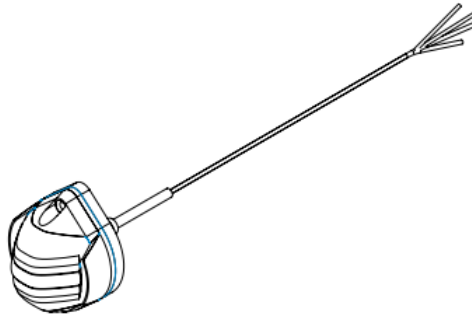

Product Datasheet
SunTail Position/Strobe Light
01-1260-12

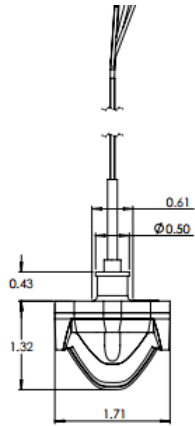

Voltage: 9-18VDC
 Position Current: 0.4A at 14V
 Strobe Peak Current: 3.3A at 14V, for 0.19 seconds
 Power: 17 Watts Average
 Power Supply: Built In
 Synchronization: Built In
 Thermal Protection: Built In
 Position: >100 Candela
 Strobe: >400 Eff. Candela
 LED Count: 18

Length: 2.2"
 Width: 1.7"
 Height: 1.4"
 Weight: 2.6 Oz
 Heat Sink Material: Aluminum/ Clear Coat
 Lens Material: Polycarbonate
 MTBF: >30,000 Hours
 Temperature Range: -55C to +70C