

SAFE-HEET
Application Guide

TELEDYNE CONTINENTAL Model Series	SAFE-HEET Model
A65, A75, C-75, C-85, C-90, 0200	705
C-125, C-145, O-300	700
GO-300	700
E165, E185, E225	700*
IO-360, TIO-360, LTSIO-360	700
O-470, IO-470, LIO-470, FSO-470, TSIO-470, GIO-470	720**
IO-520, GTSIO-520, LTSIO-520, IO-550	720**


AVCO LYCOMING Model Series	SAFE-HEET Model
O-235, O-290, O-320 (EXCEPT O-320-H), IO-320, AIO-320, LIO-320, AEIO-320,	700*
O-360, HO-360, LO-360, IO-360, HIO-360, AIO-360, LIO-360, LHIO-360, AEIO-360, VO-360, IVO-360, TIO-360, TO-360, TIO-360, LTO-360	700*
O-435, GO-435, VO-435, GO-480, GSO-480, IGSO-480	700*
O-540, VO-540, TVO-540, IO-540, HIO-540, AEIO-540, IGO-540, IGSO-540, IVO-540, TIO-540, LTIO-540, TIVO-540,	720**
IO-720	720**

FRANKLIN Model Series	SAFE-HEET Model
6A4-150 and 6A4-165	715


* Some engines will accept Model 715

** Where the oil sump area is limited, Model 715 or Model 700 may be used.

Engine oil sump configurations may vary for specific engine models. There is insufficient oil sump or oil tank area and clearances as specified in the SAFE-HEET Installation Instructions for use of the SAFE-HEET engine heaters on some engine - airframe installations. For dry sump engines use SAFE-HEET pads on the oil tank. The installer must evaluate as per the SAFE-HEET Installation Instructions the available oil sump or oil tank area below the oil level for use of SAFE-HEET pads on all engine models.

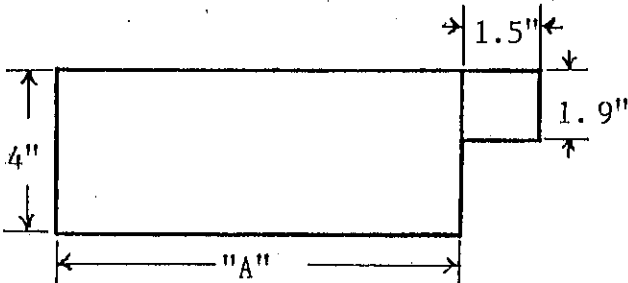

MODEL	LENGTH "A"
700	4 inches
715	5 inches
720	7 inches

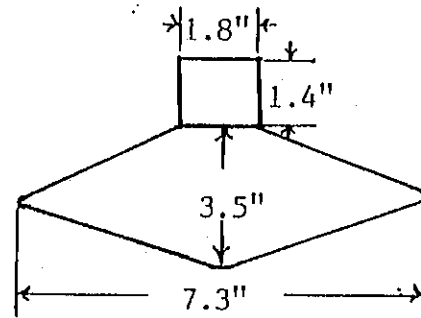

MODEL 705

		McFarlane Aviation, Inc.
		Date: 12-8-94 Approved By: DAM
1/19/95 A	See Rev. Sheet	Drawing No. SH101
REVISION		